
C3 SERIES

3/32" WIRE ROPE

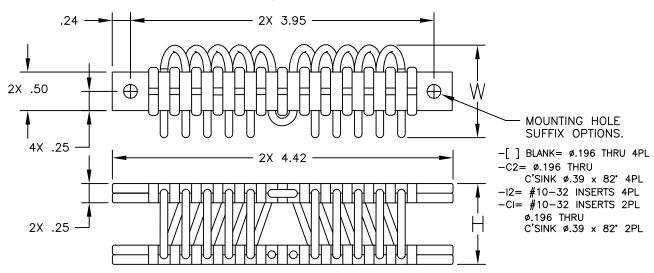

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in) H±.06 W(REF)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
C3-H-310-[]	.90	1.10	COMPRESSION SHEAR/ROLL 45 DEG. C/R	340 155 130	480 140 260	.30 .40 .60
C3-H-410-[]	1.00	1.20	COMPRESSION SHEAR/ROLL 45 DEG. C/R	275 120 100	385 105 200	.35 .50 .70
C3-H-510-[]	1.10	1.30	COMPRESSION SHEAR/ROLL 45 DEG. C/R	200 90 55	285 75 145	.40 .55 .80
C3-H-610-[]	1.30	1.50	COMPRESSION SHEAR/ROLL 45 DEG. C/R	100 45 40	155 45 100	.60 .70 1.00
C3-H-710-[]	1.40	1.60	COMPRESSION SHEAR/ROLL 45 DEG. C/R	55 35 30	85 35 65	.80 .80 1.20
C3-H-810-[]	1.50	1.70	COMPRESSION SHEAR/ROLL 45 DEG. C/R	40 25 20	70 30 50	.90 .90 1.20

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

\sim	RT		_		•
<i>(</i> ' –	$\boldsymbol{\nu}$	-		-	10.

SALES ORDER:

JOB NAME:______CUSTOMER :_____

CUSTOMER P.O.:

MODEL C3 SERIES HELICAL WIRE ROPE ISOLATOR



THE VMC GROUP
The Power of Together
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION