


# CB61400 SERIES

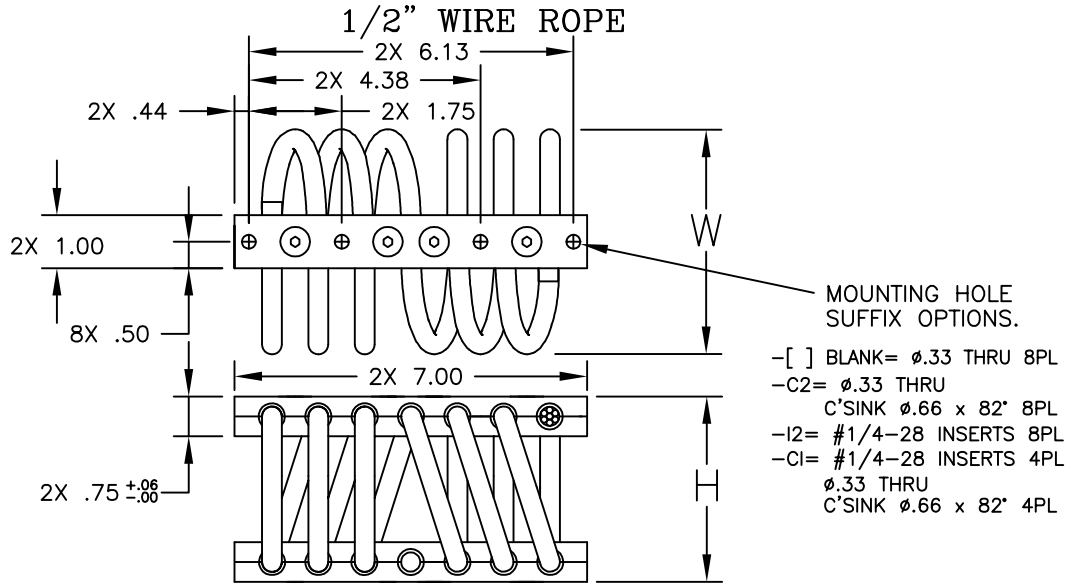

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H $\pm$ .09	W(REF)				
CB61400-15-[ ]	3.25	4.00	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1990 810 1075	4895 1105 3265	1.40 1.60 2.40
CB61400-17-[ ]	3.50	4.13	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1570 650 840	3750 805 2625	1.60 1.80 2.80
CB61400-20-[ ]	3.75	4.75	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1025 555 580	2740 555 1835	2.00 2.00 3.20
CB61400-30-[ ]	4.25	5.25	COMPRESSION SHEAR/ROLL 45 DEG. C/R	680 315 395	1690 420 940	2.40 2.40 3.60
CB61400-40-[ ]	4.90	5.65	COMPRESSION SHEAR/ROLL 45 DEG. C/R	500 240 300	1275 320 860	2.80 2.80 4.00
CB61400-50-[ ]	5.40	6.13	COMPRESSION SHEAR/ROLL 45 DEG. C/R	375 195 185	940 285 565	3.20 3.20 4.40
CB61400-60-[ ]	6.10	7.10	COMPRESSION SHEAR/ROLL 45 DEG. C/R	200 110 125	395 125 270	4.00 3.60 5.20

NOTES:

- ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
- ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL CB61400 SERIES  
 WIRE ROPE ISOLATOR**



**THE VMC GROUP**  
*The Power of Together*  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION