

114R-105065 REV.: 2 04/27/20 REV.: 2 04/27/20 REV. DESCRIPTION DATE BY

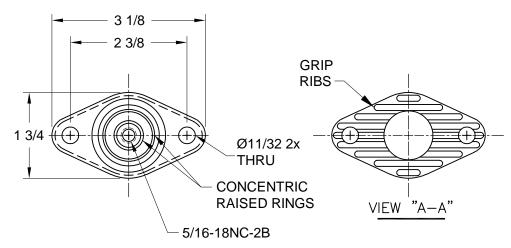

	MODEL, ELASTOMERIC, RDX1 NITRILE						
PART NUMBER	MODEL	RATED AXIAL LOAD- LBS	SHORE A DURO ±5	RATED DEFLECTION	COLOR CODE		
770054-6	RDX1-06	70	50	0.4	PURPLE		
770054-7	RDX1-07	55	45	0.4	YELLOW/BLUE		
770054-9	RDX1-09	35	35	0.4	YELLOW/RED		
770054-10	RDX1-10	120	60	0.4	PINK		
770054-11	RDX1-11	170	70	0.4	RED/RED		



1	3	(5)	7
2	4	6	8

NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES, INTERPRET PER ANSI Y14.
- 2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY.
- MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, SERVICE CONDITIONS. CONSULT VMC FOR APPLICABILITY.
- A COLOR CODED DOT IS APPLIED TO THE ISOLATOR TO IDENTIFY MODEL TYPE.

ISOLATOR SELECTIONS		
LOC 1:	LOC 2:	
LOC 3:	LOC 4:	
LOC 5:	LOC 6:	
LOC 7:	LOC 8:	
CUSTOMER EQP'T. TAG:	•	

NOTE: MATERIAL SHOWN IS FOR (1) SET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

SALES ORDER:

JOB NAME: _____CUSTOMER :

CUSTOMER P.O.:

MODEL RDX1 35-170 LBS.
NITRILE ELASTOMERIC ISOLATOR
0.4 INCH DEFLECTION

VMC
GROUP
THE POWER OF TOGET

NONE
SHEET:
DRAWING NO.:

Member VV-VISCMA

REVISION

Bloomingdale, NJ 07403 Houston, TX 77041