


SEE DET. 1

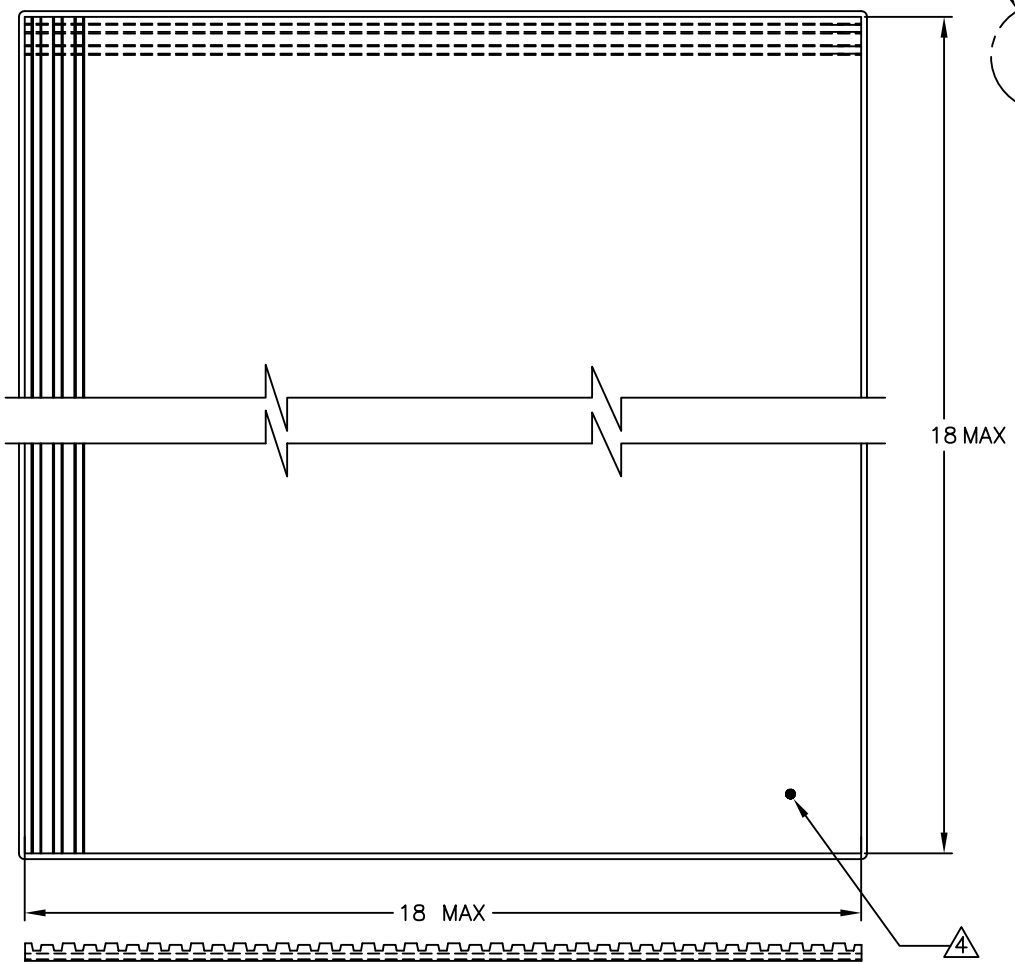

REV.	DESCRIPTION	DATE	BY

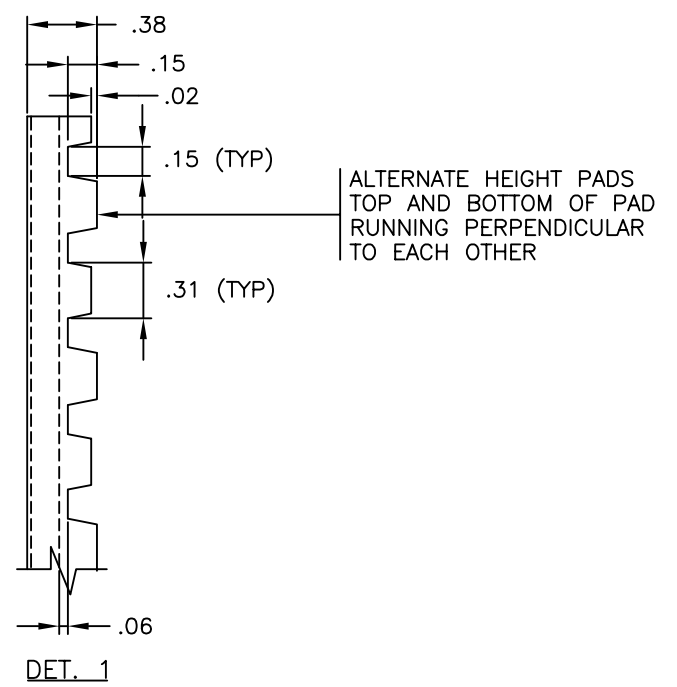


TABLE 1

PART NUMBER	MODEL DESIGNATION	RATED COMPRESSIVE LOAD (PSI)	SHORE A DURO ±5
334006	SHEAR-FLEX BLACK	40	40
334007	SHEAR-FLEX RED	50	50
334008	SHEAR-FLEX GRAY	100	70

- NOTES:
- 1 DIMENSIONS FOR CUSTOMER REFERENCE.
 2. TABLE 1 IS AVERAGE DESIGN DATA FOR REFERENCE.
 3. MOLDED CUSTOMER PAD, RESISTANT TO MODERATE OUTDOOR ENVIRONMENTS. CONSULT VMC FOR APPLICABILITY.
 - 4 COLOR CODE DOT AS REQUIRED.
 5. CUSTOM CUT LENGTH AND WIDTH AVAILABLE CONTACT VMC FOR AVAILABILITY.
 - 6 CONTACT VMC FOR APPLICABLE RATED LOAD.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____

CUSTOMER : _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL SHEAR-FLEX 40-100 PSI.
3/8" INCH THICK
ELASTOMERIC PAD**

VMC GROUP
THE POWER OF TOGETHER®
Bloomingdale, NJ 07403
Houston, TX 77041

SCALE: NONE

SHEET: _____

DRAWING NO.: _____

REVISION: _____