


174R-103047 REV.: 2

REV.	DESCRIPTION	DATE	BY

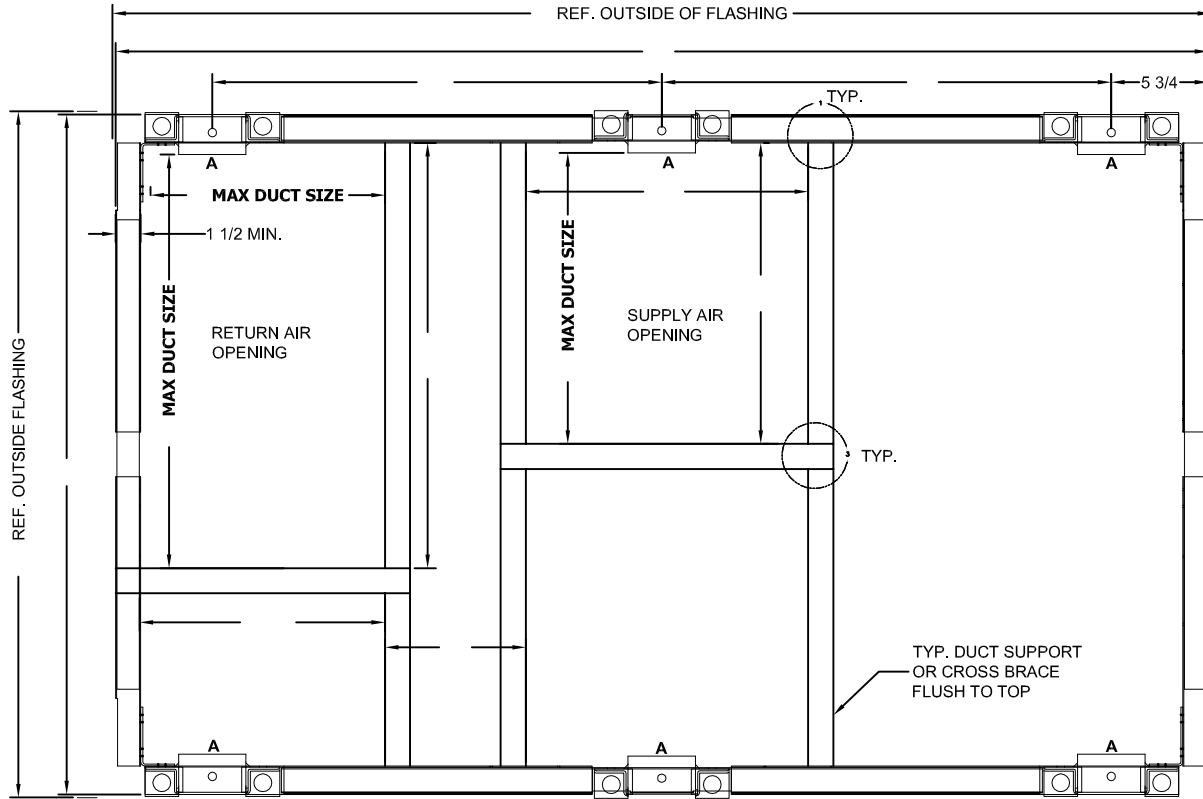

CURB DATA
 TOTAL CURB WEIGHT: 100 LBS
 QUANTITY: 1
 SHIPPED IN: 1 SECTION(S)
 LOWER RAIL O.A. DIMS.:
 CURB HEIGHT:
 CURB LINEAL FOOTAGE:

OPTIONS

YES	NO	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	SEISMIC
<input checked="" type="checkbox"/>	<input type="checkbox"/>	ISOLATED
<input checked="" type="checkbox"/>	<input type="checkbox"/>	DUCT SUPPORT
<input type="checkbox"/>	<input checked="" type="checkbox"/>	CONCRETE ROOF ATTACHMENT
<input checked="" type="checkbox"/>	<input type="checkbox"/>	STEEL ROOF ATTACHMENT

SPRING NOTE

SPRING POCKET LOCATION	SPRING IDENT. NO.	COLOR	MAX. RATED LOAD PER POCKET	MAX. DEFL. (IN.)

TAG: _____
 MANUFACTURER: _____
 MODEL NUMBER: _____
 OPERATING WEIGHT: _____

- NOTES:**
1. ROOFING AND INSULATION TO BE SUPPLIED BY OTHERS.
 2. OUTSIDE DIMENSIONS OF CURB MATCH UNIT MANUFACTURERS CURB.
 3. SEE BULLETIN XXXX FOR TYPICAL INSTALLATION DETAILS AND ADJUSTMENT INSTRUCTIONS.
 4. FOR MANUFACTURING DETAILS, REFERENCE SUBSEQUENT DRAWING SHEETS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL TELECUB
 ISOLATED TELESCOPING CURB**



SCALE: NONE	Member VISCMA
SHEET:	
DRAWING NO.:	REVISION