


REV.	DESCRIPTION	DATE	BY

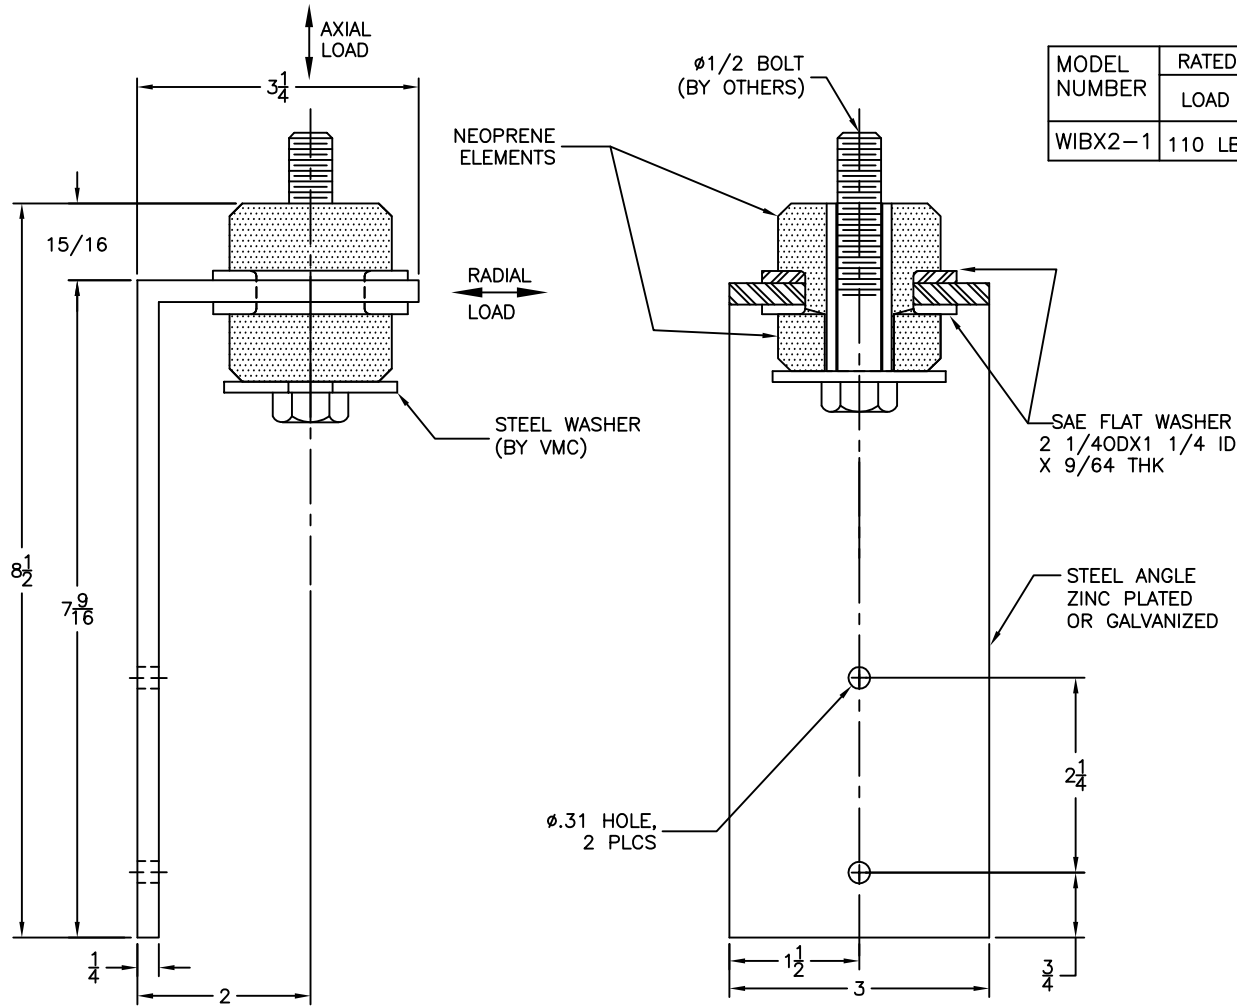

MODEL NUMBER	RATED AXIAL LOAD VS. DEFLECTION				MAXIMUM ASSIGNED WALL WEIGHT	MAXIMUM RADIAL LOAD
	LOAD	DEFL.	LOAD	DEFL.		
WIBX2-1	110 LBS	.05 IN.	180 LBS	.10 IN.	350 LBS	120 LBS

NOTES:

1. WALL MUST BE SUPPORTED AT THE BASE.
2. NOMINAL "STATIC" LOAD IS ZERO. MAXIMUM ASSIGNED WALL WEIGHT IS INTENDED TO ALLOW FOR POTENTIAL BUCKLING OR EXPANSION FORCES.
3. NEOPRENE ELEMENT AND WASHER ARE SHIPPED TIE WIRED TO BRACKET.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER : _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

MODEL WIBX2 110-180 LBS. ELASTOMERIC WALL ISOLATION BRACE



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION