


# CB1300 SERIES

3/8" WIRE ROPE

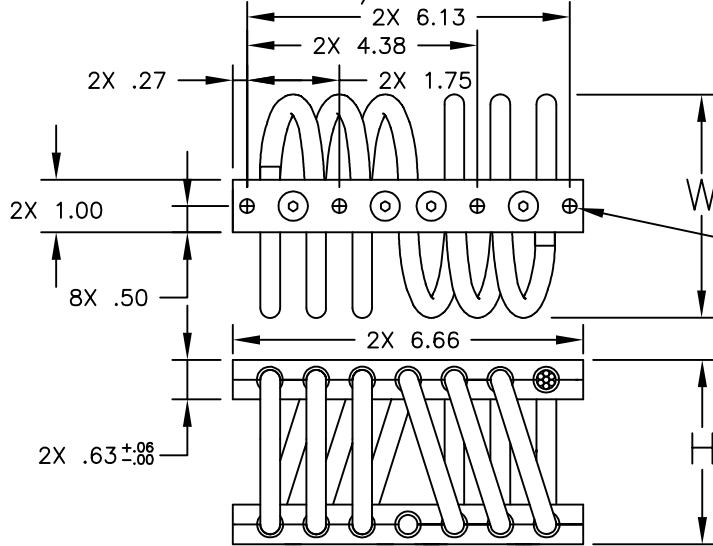

MOUNTING HOLE SUFFIX OPTIONS.

- [ ] BLANK=  $\phi$ .28 THRU 8PL
- C2=  $\phi$ .28 THRU C'SINK  $\phi$ .52 x 82' 8PL
- I2= #1/4-28 INSERTS 8PL
- CI= #1/4-28 INSERTS 4PL  $\phi$ .28 THRU C'SINK  $\phi$ .52 x 82' 4PL

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H $\pm$ .09	W(REF)				
CB1300-15-[ ]	2.80	3.31	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1310 555 625	3395 550 1860	1.00 1.20 1.60
CB1300-20-[ ]	2.90	3.50	COMPRESSION SHEAR/ROLL 45 DEG. C/R	1005 420 470	2445 445 1555	1.20 1.40 2.00
CB1300-30-[ ]	3.00	4.13	COMPRESSION SHEAR/ROLL 45 DEG. C/R	655 300 310	1315 345 1010	1.40 1.60 2.40
CB1300-25-[ ]	3.25	4.25	COMPRESSION SHEAR/ROLL 45 DEG. C/R	520 235 240	1030 270 815	1.60 1.80 2.80
CB1300-35-[ ]	3.50	4.25	COMPRESSION SHEAR/ROLL 45 DEG. C/R	415 175 190	775 215 545	1.80 2.00 3.20
CB1300-40-[ ]	4.13	4.75	COMPRESSION SHEAR/ROLL 45 DEG. C/R	300 130 125	600 140 420	2.20 2.40 4.00
CB1300-50-[ ]	4.25	5.50	COMPRESSION SHEAR/ROLL 45 DEG. C/R	200 100 85	355 110 300	2.40 2.60 4.40

NOTES

- ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
- ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER: \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

**MODEL CB1300 SERIES  
 WIRE ROPE ISOLATOR**



**THE VMC GROUP**  
 The Power of Together  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION