


CB1900 SERIES

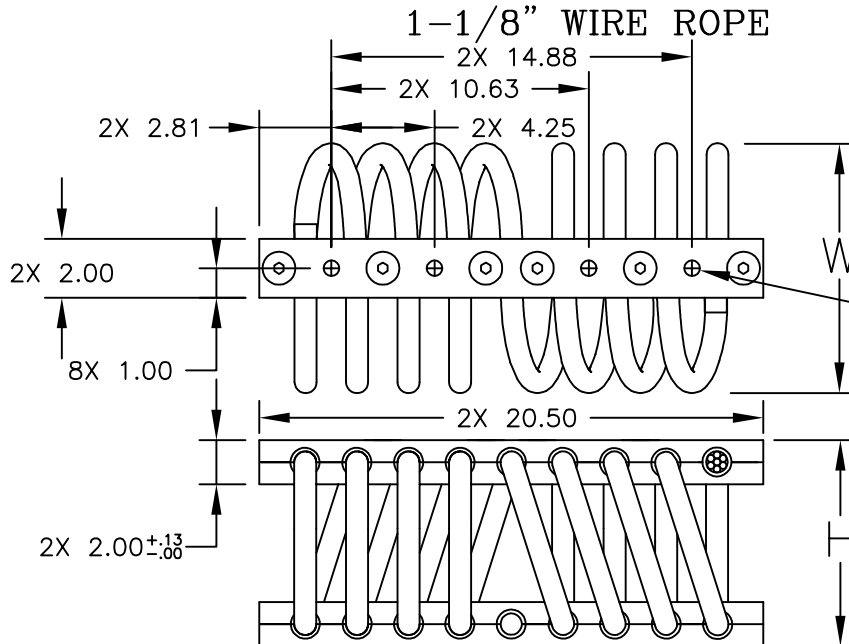

MOUNTING HOLE SUFFIX OPTIONS.

- [] BLANK= ϕ .78 THRU 8PL
- C2= ϕ .78 THRU
C'SINK ϕ 1.44 x 82' 8PL
- T2= #3/4-10 TAP 8PL
- CT= #3/4-10 TAP 4PL
 ϕ .78 THRU
C'SINK ϕ 1.44 x 82' 4PL

* INSERTS ARE NOT AVAILABLE FOR THE LARGER SERIES ISOLATORS

ISOLATOR PART NO.	NOMINAL DIMENSIONS (in)		LOAD MODE	SHOCK AVERAGE K (lb/in)	VIBRATION AVERAGE K (lb/in)	MAX. RATED DYNAMIC TRAVEL (in)
	H \pm .25	W(REF)				
CB1900-10-[]	7.00	8.50	COMPRESSION	5565	10500	2.00
			SHEAR/ROLL	2620	2375	2.00
			45 DEG. C/R	3545	7250	2.40
CB1900-12-[]	8.50	9.50	COMPRESSION	3180	7250	3.20
			SHEAR/ROLL	1650	1785	3.20
			45 DEG. C/R	1840	4625	4.00
CB1900-15-[]	9.25	10.25	COMPRESSION	2190	5000	4.00
			SHEAR/ROLL	1125	1375	4.00
			45 DEG. C/R	1130	3375	6.40

NOTES

1. ALL DIMENSIONS ARE IN INCHES. INTERPRET PER ANSI Y14
2. ALL DIMENSIONS ARE NOMINAL AND FOR REFERENCE ONLY

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL CB1900 SERIES
 WIRE ROPE ISOLATOR**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION