
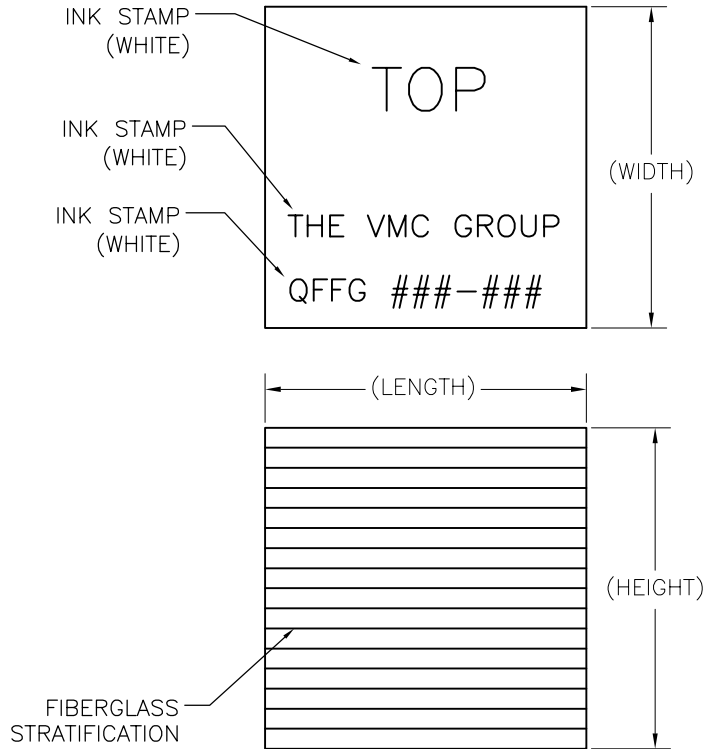


| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
|      |             |      |    |

| PART NUMBER    | MODEL NUMBER | RATED LOAD | HEIGHT  | LENGTH  | WIDTH   | APP. WT. | COATING COLOR |
|----------------|--------------|------------|---------|---------|---------|----------|---------------|
| 100001-222-400 | QFFG 222-400 | 400 LBS.   | 2.0-IN. | 2.0-IN. | 2.0-IN. | .12 LBS. | BLACK         |
| 100001-233-900 | QFFG 233-900 | 900 LBS.   | 2.0-IN. | 3.0-IN. | 3.0-IN. | .27 LBS. | BLACK         |

FIGURE 1 WEIGHT VS NATURAL FREQUENCY

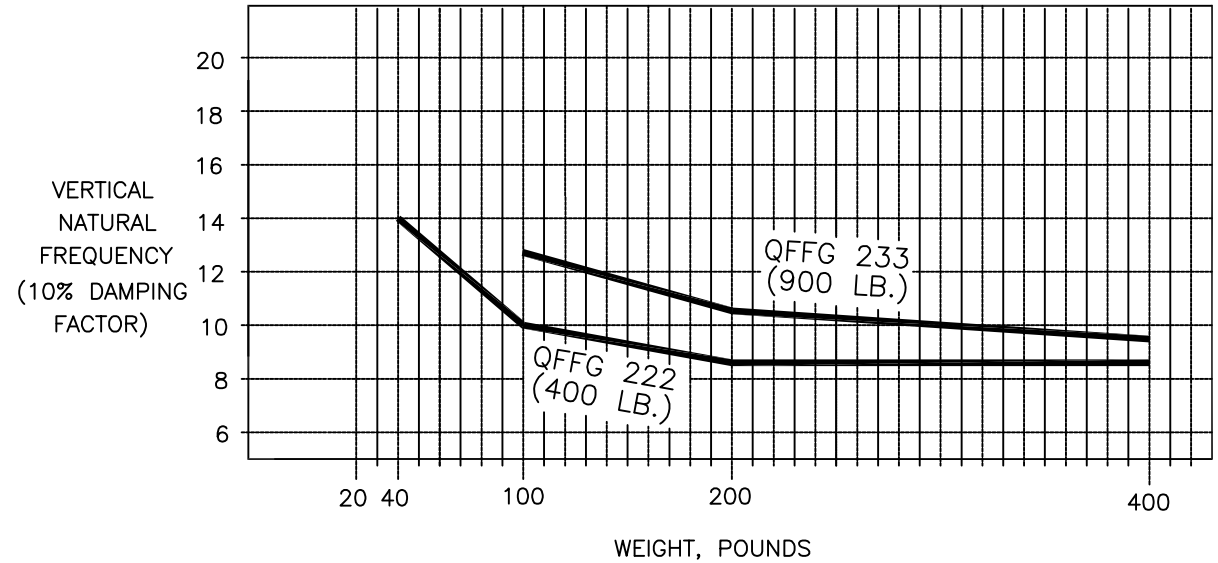

NOTES:

- ISOLATORS ARE MOLDED FROM GLASS FIBERS WITH FIBER DIAMETERS NOT EXCEEDING .00027 INCHES.
- ENTIRE BLOCK COATED WITH A FLEXIBLE, MOISTURE IMPERVIOUS ELASTOMER MEMBRANE.
- BLOCKS ARE STABILIZED BY COMPRESSION CYCLES TO THREE (3) TIMES THE RATED LOAD OF THE ISOLATORS.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



**CERTIFIED FOR:**

JOB NAME: \_\_\_\_\_  
 CUSTOMER : \_\_\_\_\_  
 CUSTOMER P.O.: \_\_\_\_\_  
 SALES ORDER: \_\_\_\_\_

OUTLINE DRAWING  
 QUIET-FLEX  
 ISOLATION BLOCKS  
 (QFFG)

**VMC GROUP**  
 THE POWER OF TOGETHER™  
 Bloomingdale, NJ 07403  
 Houston, TX 77041

|              |        |
|--------------|--------|
| SCALE:       | NONE   |
| SHEET:       | 1 OF 1 |
| DRAWING NO.: |        |



REVISION